


# search light mains



<b>SL-210 / wall</b> h: 210mm d: 270mm w: 210mm	<b>HI-SEARCH / 50</b> h: 185mm d: 105mm w: 120mm	<b>HI-SEARCH / 40</b> h: 200mm d: 120mm w: 75mm	<b>ES 63</b> 240V 63mm dia. 75W 25°, 50°	<b>HI-SPOT 50</b> 240V 50mm dia. 50W 25°, 40°
<b>SL-210 / tripod</b> h: 1850mm				

Hi-search / 50 / T / Hi-Spot 50

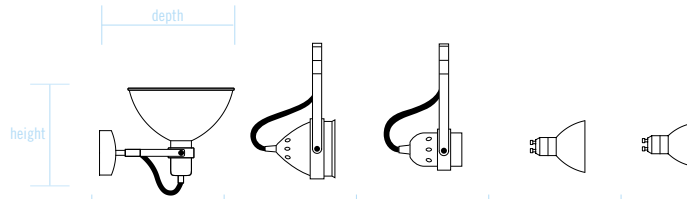

## SL-40

240v mains powered fitting accepts both PAR 20 and PAR 30 halogen lamps.

## Hi search-40

Mains powered fitting with GU10 Lampholder using 75W ES63 compact halogen lamp.

## Hi search-50

Mains powered fitting accepts the Hi-Spot 50 watt halogen lamp

## Hi search/R

Recessed fitting in fixed or tilt adjustable types Hi-Spot 50 and ES63 versions available.

## SL-210

Mains powered uplighter with 3 lamp options: single ended tungsten halogen, PAR 30 or standard GLS lamp. Wall and tripod versions offered.

### OPTIONS

/D	surface fixing plate ø 90mm x 35mm
/C	surface fixing plate ø 105mm x 16mm
/T	track adaptor (Nordic or Aktrac)
/P	pendant lengths: 100/200/300/500/600

See fixings sheet for details

### FINISHES

Standard: matt silver, white.  
Special finishes on request.

### TRACKS

Nordic globaltrac base 240v 1m/2m/3m single circuit  
white, silver or black

Nordic globaltrac pro / Eutrac 240v 1m/2m/3m three circuit  
white, silver or black

Full Details - see track sheet



Hi Search / 40/ B / ES63



Hi Search / R / Fixed / Hi-Spot 50



Hi Search R / Adjustable / Hi-Spot 50



SL-210 / Wall

