


b-line LED

1by1 wave
2by2 wave

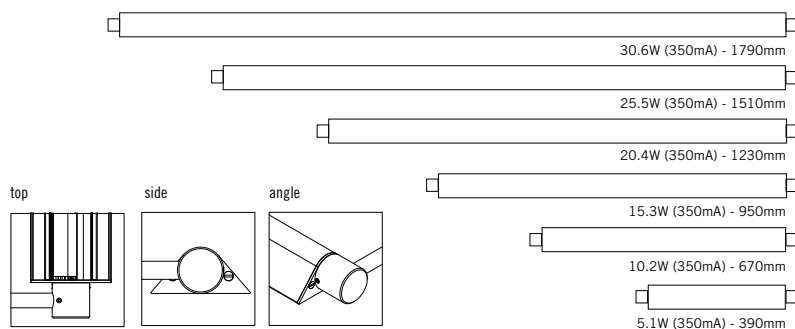

b-line/LED/1by1/wave
b-line/LED/2by2/wave
details

b-line/LED/1by1/wave
b-line/LED/2by2/wave
lengths



b-line/LED/1by1/wave - detail

B-LINE/LED/1by1/wave


Design: Aktiva, 2014

B-Line/LED/1By1/Wave offers glare-free wider spread beam shade version of this 1-sided desk fitting. All features of the high performance/100 lumens per watt original B-Line: can be joined in multiples, tailored lengths, lockable shade adjustment and comprehensive colour temperature options.

B-LINE/LED/2by2/wave

Design: Aktiva, 2014


B-Line/LED/2By2/Wave offers glare-free shade for double-sided desk fitting. All features of the high performance/100 lumens per watt original B-Line: can be joined in multiples, tailored lengths, lockable shade adjustment and comprehensive colour temperature options.

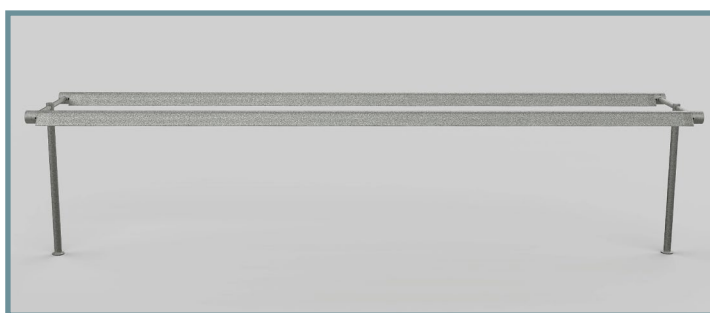

b-line/LED/2by2/wave - stainless steel



b-line/LED/2by2/wave - detail - satin stainless steel effect

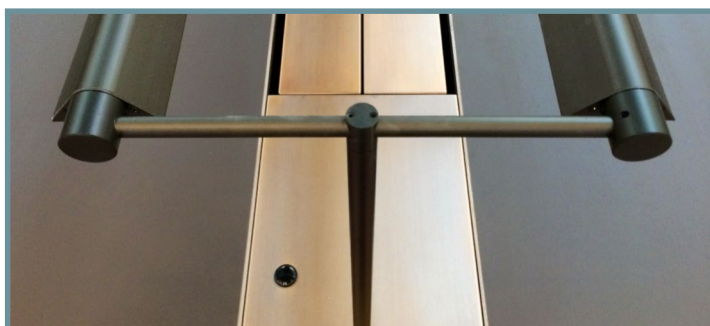

b-line/LED/2by2/wave - detail



b-line/LED/1by1/wave



b-line/LED/2by2/wave - detail

LED

Linear LED producing 100 lumens per Watt* with standard 30° PMMA satin lens. Available in Warm White 2700°K White 3000°K & Cool White 4000°K. LED CRI: 82 – 84.

| Length | Wattage | Voltage (d.c) | Total Luminous Output | |
|---------|---------|---------------|-----------------------|---------|
| | | | 3000°K | 4000°K |
| 390 mm | 5.1 W | 15 V | 590 lm | 627 lm |
| 670 mm | 10.2 W | 30 V | 1179 lm | 1254 lm |
| 950 mm | 15.3 W | 45 V | 1769 lm | 1882 lm |
| 1230 mm | 20.4 W | 60 V | 2358 lm | 2509 lm |
| 1510 mm | 25.5 W | 75 V | 2948 lm | 3136 lm |
| 1790 mm | 30.6 W | 90 V | 3538 lm | 3763 lm |

DRIVERS

| | |
|--------------------------|------------------------------|
| AKT/350-240-56V-C | 390-950mm b-line/LED (350mA) |
| AKTS ECXe 350.028 186226 | 1510mm+ b-line/LED (350mA) |

Higher 350mA output, 500mA & 700mA available on application.

OPTIONS

| | |
|--------------------------|---------------------------------|
| /multiple | x2 x3 x4..... in continuous run |
| /press/remote | remote on/off press switch |
| /horizontal support arms | Standard 150mm |
| /...mm length | shade/s cut to special lengths |
| /white warm LED | 2700°K colour temperature |
| /white LED | 3000°K colour temperature |
| /white cool LED | 4000°K colour temperature |
| /w3 | Ø30mm washer fixing |

See **FIXINGS SHEET** for more details

See **CONTROLS** for more details

FINISHES

Standard Coated: matt silver, white
Standard Plated: satin stainless steel effect, polished chrome, polished brass, brushed brass
Special finishes on request (including bronze coated) on request
See **FINISHES** sheet for details

